

**Features**

- 2-channel
- DC version, negative polarity
- Working voltage 26.5 V/6.5 V at 10  $\mu$ A
- Series resistance max. 250  $\Omega$ /64  $\Omega$
- Fuse rating 80 mA
- DIN rail mounting
- High power version
- Asymmetrical version
- Internal measuring resistor

**Function**

The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area.

The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has a negative polarity, i. e. the cathodes of the zener diodes are grounded.


This high power version has a smaller serial resistance and therefore provides higher voltage to the field device.

**Application**



Asymmetrical Zener barriers are for optimization of applications which have different voltage levels regarding to ground potential.

Depending on the application, increased or decreased intrinsic safety parameters apply for serial or parallel connection. For the detailed parameters refer to the Zener barrier certificate. Application examples can be found in the system description of the Zener barriers.

**Assembly**

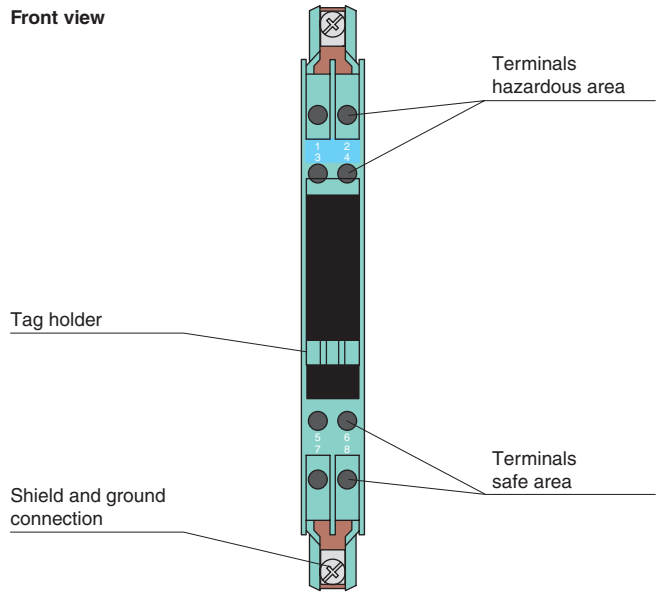

**Connection**

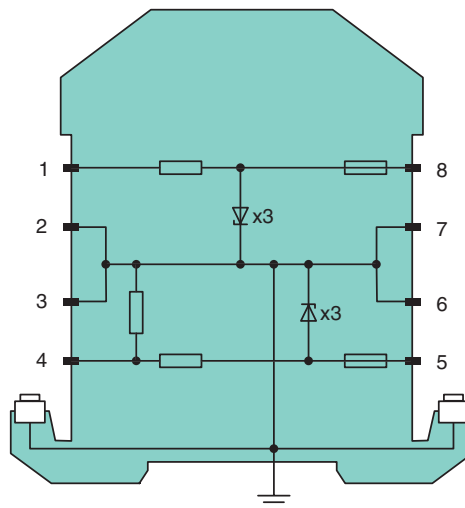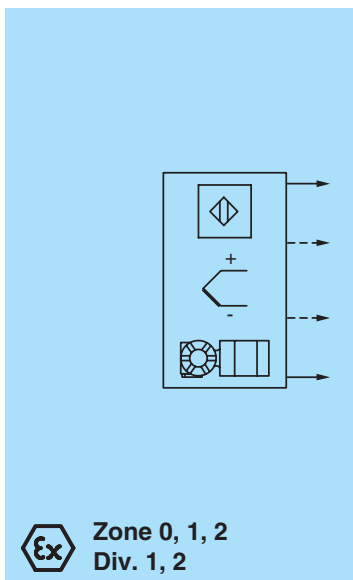

Release date 2010-03-17 14:56 Date of issue 2010-03-17 071975\_ENG.xml

<b>General specifications</b>	
Type	DC version, negative polarity
<b>Electrical specifications</b>	
Nominal resistance	terminals 1, 8: 240 Ω; terminals 4, 5: 50 Ω
Series resistance	terminals 1, 8: max. 250 Ω; terminals 4, 5: max. 64 Ω
Fuse rating	80 mA
<b>Hazardous area connection</b>	
Connection	terminals 1, 2; 3, 4
Measuring resistor	terminals 2, 3 to 4: internal resistor 250 Ω for 5 V signal on terminals 6, 7 to 5
<b>Safe area connection</b>	
Connection	terminals 5, 6; 7, 8
Rated voltage	terminals 7, 8: 28 V; terminals 5, 6: 10 V
Supply voltage	terminals 7, 8: max. 28 V; terminals 5, 6: max. 9.1 V
Working voltage	terminals 7, 8: 26.5 V at 10 μA; terminals 5, 6: 6.5 V at 10 μA
<b>Conformity</b>	
Protection degree	IEC 60529
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-25 ... 70 °C (-13 ... 158 °F)
Relative humidity	max. 75 % , without moisture condensation
<b>Mechanical specifications</b>	
Protection degree	IP20
Connection	self-opening connection terminals, max. core cross-section 2 x 2.5 mm <sup>2</sup>
Mass	approx. 150 g
Dimensions	12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 in)
Construction type	modular terminal housing , see system description
Mounting	mounting on 35 mm DIN rail acc. to DIN EN 60715
<b>Data for application in connection with Ex-areas</b>	
EC-Type Examination Certificate	BAS 01 ATEX 7005 , for additional certificates see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a>
Group, category, type of protection	⊕ II (1)GD [EEx ia] IIC (-20 °C ≤ T <sub>amb</sub> ≤ 60 °C)
Voltage U <sub>o</sub>	terminals 1, 2: 28 V; terminals 3, 4: 9.56 V
Current I <sub>o</sub>	terminals 1, 2: 119 mA; terminals 3, 4: 195 mA
Power P <sub>o</sub>	terminals 1, 2: 830 mW; terminals 3, 4: 470 mW
Supply	
Maximum safe voltage U <sub>m</sub>	250 V
Series resistance	terminals 1, 2: min. 235 Ω; terminals 3, 4: min. 49 Ω
Statement of conformity	
Group, category, type of protection, temperature classification	TÜV 99 ATEX 1484 X , observe statement of conformity
Directive conformity	⊕ II 3G EEx nA II T4 X
Directive 94/9/EC	
Directive 94/9/EC	EN 50014, EN 50020, EN 50021
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2010-03-17 14:56 Date of issue 2010-03-17 071975\_ENG.xml