

Features

- System Board for Honeywell Experion PKS, Series C
- For 16-channel cards CC-TAIX01/11 (AI) and CC-TAOX01/11 (AO)
- For 8 modules
- Recommended modules: HiD2030SK (AI), HiD2081 (Temp.), HiD2032 (AO)
- Recommended system cable: CA-HWC300-AIO-DIO-*M
- 24 V DC supply
- Hazardous area: pluggable screw terminals, blue
- Safe area: Sub-D connector (male), 37-pin

Function

Termination Boards are made to carry isolated barriers and provide terminal connection for wiring. The termination board and the isolated barriers build the connection between field and system level.

System connectors are syntonized to the requirements of the I/O cards used in the particular automation system. They ensure fast and fail-safe connection.

Information about missing supply voltage of the interface modules is available for the system as potential free relay contact. Wiring errors from field will be reported if the interface module supports this function.

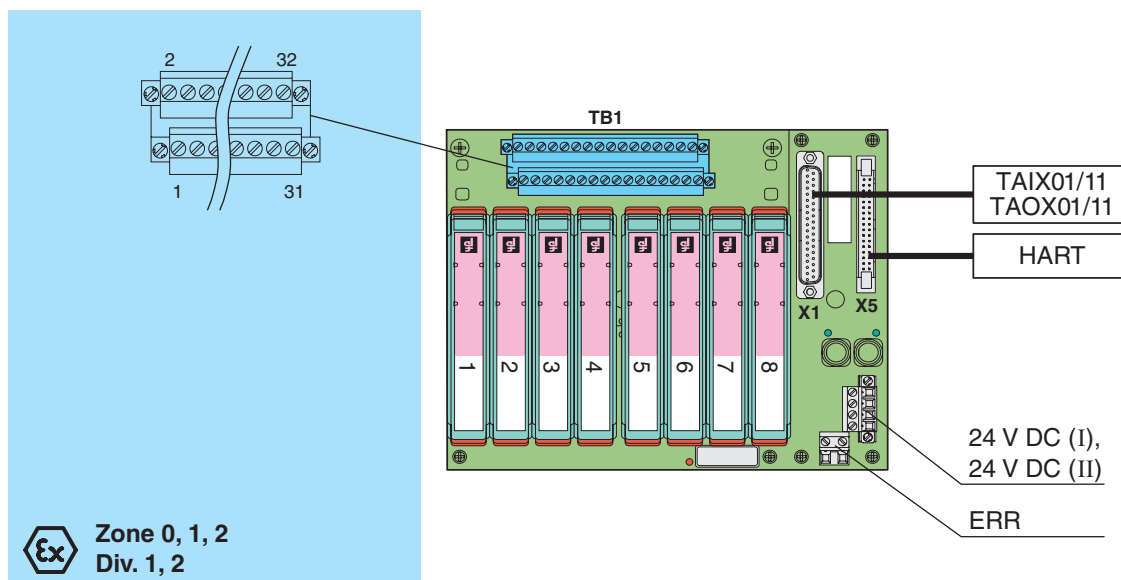
The Termination Boards are supplied with a robust glass fibre reinforced plastic housing as standard. This design permits the fast and reliable installation in the switch cabinet.

Application

In case of using the temperature converter HiD2081 channel 2, 4, 6, 8, 10, 12, 14, 16 of the CC-TAIX01/11 card are not supported.



Connection






Release date 2012-04-27 15:50 Date of issue 2012-04-27 209352_eng.xml



Zone 0, 1, 2
Div. 1, 2

Zone 2
Div. 2

Supply	
Connection	terminal block TB3 (1-, 2+; 3-, 4+)
Rated voltage	24 V DC , in consideration of rated voltage of used isolated barriers
Voltage drop	0.9 V , voltage drop across the series diode on the Termination Board must be considered
Ripple	≤ 10 %
Fusing	2 A
Power loss	≤ 500 mW , without modules
Reverse polarity protected	yes
Redundancy	
Supply	Redundancy available. The supply for the modules is decoupled, monitored and fused.
Output	
Connection	terminal block TB4 (1, 2), error message output, NO contact
Fault signal	max. 30 V AC/40 V DC, 2 A
Indicators/settings	
Display elements	LEDs PWR ON (power supply) - LED power supply I, green LED - LED power supply II, green LED LED Fault (fault indication), red LED
Directive conformity	
Electromagnetic compatibility Directive 2004/108/EC	EN 61326-1:2006
Conformity	
Electromagnetic compatibility	NE 21:2006
Protection degree	IEC 60529
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications	
Protection degree	IP20
Connection	hazardous area connection (field side): plugable screw terminals, blue safe area connection (control side): 37-pin Sub-D connector (male)
Material	housing: polycarbonate, 30 % fiberglass reinforced
Mass	approx. 500 g
Dimensions	201 x 155 x 153 mm (7.9 x 6.1 x 6.0 in) , height including module assembly
Mounting	on 35 mm DIN mounting rail acc. to DIN EN 60715
Data for application in connection with Ex-areas	
EC-Type Examination Certificate Group, category, type of protection	CESI 11 ATEX 062 , for additional certificates see www.pepperl-fuchs.com   
Safe area Maximum safe voltage	250 V (Attention! U_m is no rated voltage.)
Electrical isolation Field circuit/control circuit	safe galvanic isolation acc. to IEC 60079-11, voltage peak value 375 V
Directive conformity Directive 94/9/EC	EN 60079-0:2009, EN 60079-11:2007, EN 60079-26:2007 , EN 61241-11:2006 , EN 50303:2000
International approvals	
IECEx approval Approved for	IECEx CES 11.0022 [Ex ia Ga] IIC [Ex ia Da] IIIC [Ex ia Ma] I
General information	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Designation	provided accessories: Label Carrier HiALC-HI*TF-SET-1** optional accessories: system cable CA-HWC300-AIO-DIO-*M

Release date 2012-04-27 15:50 Date of issue 2012-04-27 209352_eng.xml

Configuration

pin-out-configuration

Board IS-Term. TB1	Module IS Terminal	Board Position	Board Channel	Module Non-IS Terminal	System connector X1
1	1	1	1	11	37
2	4			14	19
3	2		2	12	36
4	5			15	18
5	1	2	3	11	35
6	4			14	17
7	2		4	12	34
8	5			15	16
9	1	3	5	11	33
10	4			14	15
11	2		6	12	32
12	5			15	14
13	1	4	7	11	31
14	4			14	13
15	2		8	12	30
16	5			15	12
17	1	5	9	11	29
18	4			14	11
19	2		10	12	28
20	5			15	10
21	1	6	11	11	27
22	4			14	9
23	2		12	12	26
24	5			15	8
25	1	7	13	11	25
26	4			14	7
27	2		14	12	24
28	5			15	6
29	1	8	15	11	23
30	4			14	5
31	2		16	12	22
32	5			15	4