Dimensions







- Receptacle of the I/O modules
- Connection of the intrinsically safe field circuit
- Screw terminals, self-opening
- Mounting by clipping onto standard 35 mm rail to DIN EN 50022
- Direct wall-mounting option

Notes

- A module carrier is needed for each I/O module. The module carriers RS-TB-Ex.SC and RS-TB-Ex.SP can be combined with each other.
- Clamping screws M3, screw driver 3,5 mm x 0,5 mm
- The terminals 34 and 50 as well as the terminals 35 and 51 are internally connected, they serve for loopingthrough of the voltage supply to the neighboured module carriers.

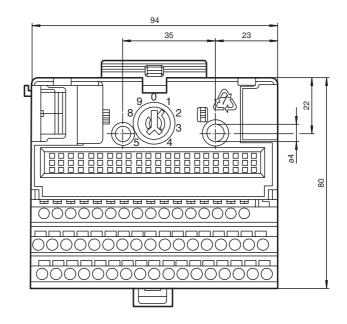

Composition

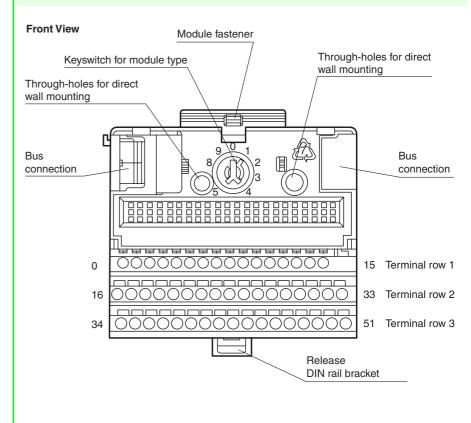

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

RS-	TB-E	x.SC
-----	------	------

Supply	
Connection	terminals 34, 50 V+; 35, 51 V-
Rated voltage	8.88 9.5 V
Internal bus	
Connection	backplane bus
Interface	manufacturer specific bus
Directive conformity	
Electromagnetic compatibility	
Directive 89/336/EEC	see I/O modules
Explosion protection	
Directive 94/9/EC	EN 60079-0: 2006, EN 60079-11: 2007
Standard conformity	
Insulation coordination	EN 50178
Electrical isolation	EN 60079-11:2007
Protection degree	IEC 60529
Climatic conditions	DIN IEC 721
Ambient conditions	
Classification	3К3
Ambient temperature	-20 70 °C (253 343 K)
Storage temperature	-20 100 °C (253 373 K)
Relative humidity	95 % non-condensing
Shock resistance	15 g peak, 11 ms period
Vibration resistance	2 g , 10 500 Hz according to IEC 60068-2-6
Damaging gas	acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications	
Connection type	terminals
Core cross-section	$\leq 2.5 \text{ mm}^2$
Housing	see I/O modules
Protection degree	IP20, for in-situ installation a separate housing is required with a minimum of IP54
Mass	approx. 230 g
Mounting	DIN rail mounting
Data for application in conjunction with hazardous areas	
EC-Type Examination Certificate	DMT 98 ATEX E 001 U, for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection	 ⟨𝔅⟩ 2G EEx ia C (1D)(2D)
Temperature class	Τ4
Input	see I/O modules
Output	see I/O modules
Internal bus	customer specific
Statement of conformity	
Group, category, type of protection, temperature classification	see I/O modules

Supplementary information

EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity and instructions have to be observed. For information see www.pepperl-fuchs.com.