




Model Number

PL-F57-2W3-GEA-Y96811


Features

- I/O module for NCN2-F56-N1

Connection



Dimensions

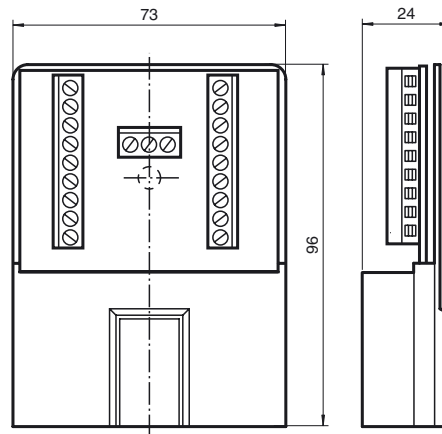

Technical Data

General specifications		
Switching element function	AC	NO
Installation		
Output polarity		
Nominal ratings		
Operating voltage	U_B	20 ... 253 V
Switching frequency	f	0 ... 20 Hz
Short-circuit protection	no	
Voltage drop	U_d	3 ... 5 V
Momentary current (20 ms, 0.1 Hz)	0 ... 1200 mA	
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 1 mA
Standard conformity		
Standards	IEC / EN 60947-5-2:2004	
Ambient conditions		
Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)	
Mechanical specifications		
Core cross-section	1.5 mm ²	
Housing material	PBT	
Protection degree	Installation in housing	
Note	1) In the temperature range below 0 °C, permissible operating voltage U_B 80...253 V Safety fuse \leq 0.8 A (quick-blow) according to IEC 60127-2 Sheet 1 Recommendation: after a short circuit, check that the device is functioning correctly.	
Approvals and certificates		
UL approval	cULus Listed, General Purpose	

Release date: 2010-11-04 15:40 Date of issue: 2010-11-05 096811_ENG.xml