


Comfort series
4 mm not embeddable



General specifications	
Switching element function	PNP Break function
Rated operating distance s_n	4 mm
Installation	not embeddable
Assured operating distance s_a	0 ... 3,24 mm
Reduction factor r_{Al}	0,3
Reduction factor r_{Cu}	0,2
Reduction factor r_{V2A}	0,7
Nominal ratings	
Operating voltage U_B	10 ... 30 V
Switching frequency f	0 ... 1300 Hz
Reverse polarity protection	Protected against reverse polarity
Short-circuit protection	pulsing
Voltage drop U_d	$\leq 2,5$ V
Operating current I_L	0 ... 250 mA
Off-state current I_r	0 ... 0,01 mA typ. 0,1 μ A at 25 °C
No-load supply current I_0	≤ 15 mA
Indication of the switching state	LED, yellow
Standard conformity	
Standards	EN 60947-5-2
Ambient conditions	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Mechanical specifications	
Connection type	2 m, PVC cable
Core cross-section	0.5 mm ²
Housing material	PBT
Sensing face	PBT
Protection degree	IP67

Connection type:

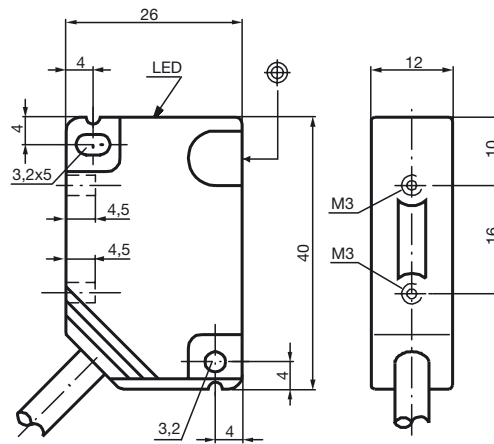