



 $\epsilon$ 



# **Model Number**


## RL28-8-H-700-IR/47/105

Background suppression sensor with 5-pin, M12 x 1 plastic connector


## **Features**

- Ultra bright LEDs for power on and switching state
- Minimal black/white difference through the infrared transmission LED
- Not sensitive to ambient light, even with switched energy saving lamps
- Waterproof, protection degree IP67
- Protection class II

## **Dimensions**

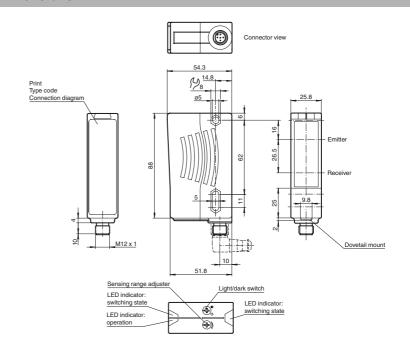

## **Electrical connection**



- O = Light on
- = Dark on

## **Pinout**





#### **Technical data General specifications** 20 ... 700 mm Detection range Detection range min. 20 ... 200 mm 20 ... 700 mm Detection range max Light source modulated infrared light, 880 nm Light type Black/White difference (6 %/90 %) < 8 % approx. 24 mm at a distance of 700 mm Diameter of the light spot Angle of divergence transmitter 2° receiver 2° 50000 Lux Ambient light limit Functional safety related parameters MTTF<sub>d</sub> 1130 a Mission Time (T<sub>M</sub>) 20 a Diagnostic Coverage (DC) 0 % Indicators/operating means Operating display LED green 2 LEDs yellow Function display ON: object inside the scanning range OFF: object outside the scanning range Controls Light/Dark switch Controls Detection range adjuster **Electrical specifications** Operating voltage $U_{\mathsf{B}}$ 10 ... 30 V DC Ripple 10 % No-load supply current $I_0$ ≤ 40 mA Output Switching type light/dark on switchable Signal output 2 PNP, complementary, short-circuit protected, reverse polarity protected , open collectors Switching voltage max. 30 V DC Switching current max. 200 mA 250 Hz Switching frequency f Response time **Ambient conditions** -40 ... 60 °C (-40 ... 140 °F) Ambient temperature Storage temperature -40 ... 75 °C (-40 ... 167 °F) Mechanical specifications Protection degree IP67 Connection M12 x 1 connector, 5-pin Material Housing Plastic ABS Optical face plastic plastic Connector 70 g Compliance with standards and directives Standard conformity EN 60947-5-2:2007 Product standard Approvals and certificates Protection class II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 UL approval cULus CCC approval Products with a maximum operating voltage of ${\leq}36~V$ do not

## **Accessories**

#### **OMH-05**

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

## **OMH-21**

Mounting bracket

#### **OMH-22**

Mounting bracket

## OMH-MLV11-K

dove tail mounting clamp

### OMH-RLK29

Mounting bracket

### OMH-RLK29-HW

Mounting bracket for rear wall mounting

#### OMH-RL28-C

Protective cover


Other suitable accessories can be found at www.pepperl-fuchs.com


PEPPERL+FUCHS

www.pepperl-fuchs.com

bear a CCC marking because they do not require approval.

## **Curves/Diagrams**

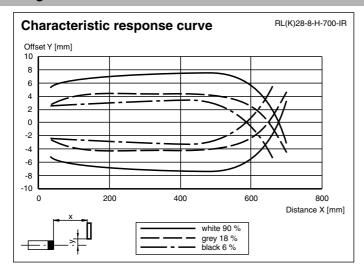

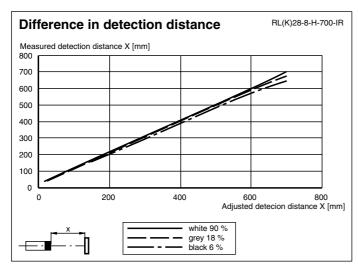

## **Additional information**

## **Mounting instructions:**

There are two bore holes for mounting the sensor with M5 bolts. The base surface must be flat to avoid distorting the housing during mounting. It is advisable to secure the bolts with spring washers so that the sensor does not become misaligned. Outdoor installation:

The sensor must be protected against rain and splash-water, possibly must a cover be installed.

## Adjustment:

Adjust the sensor on the background. After the connecting to the power supply the green LED illuminates. In case the yellow LEDs illuminate too, the detection range needs to be reduced with the detection range adjuster, until the yellow LEDs is switched off. If the object is moved into the detection range the yellow LEDs illuminates.

## **Driving inductive loads:**

If the sensor are used to drive inductive loads, the following safety procedures must be carried out: For operating voltage of 10 ... 30 V DC: fit a protection diode, max. 200 mA

fa-info@us.pepperl-fuchs.com

www.pepperl-fuchs.com