

Model Number


RL28-8-H-700-IR/105/110

Background suppression sensor with 5-pin, M12 x 1 plastic connector


Features

- Ultra bright LEDs for power on and switching state
- Minimal black/white difference through the infrared transmission LED
- Not sensitive to ambient light, even with energy saving lamps
- Waterproof, protection degree IP67
- Protection class II

Dimensions

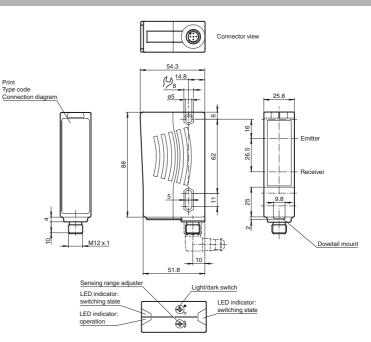

Electrical connection



Pinout



Subject to modifications without notice Pepperl+Fuchs Group US www.pepperl-fuchs.com fa-info

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com Germany: +49 621 776-4411 fa-info@pepperl-fuchs.com Copyright Pepperl+Fuchs Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



1

20 ... 700 mm

20 ... 200 mm

20 ... 700 mm IRED

transmitter 2°

receiver 2°

50000 Lux

LED green

2 LEDs yellow

Light/Dark switch

10 ... 30 V DC

Detection range adjuster

1130 a

20 a

0 %

< 8 %

modulated infrared light , 880 nm

approx. 24 mm at a distance of 700 mm

ON: object inside the scanning range OFF: object outside the scanning range

General specifications	
Detection range	
Detection range min.	
Detection range max.	
Light source	
Light type	
Black/White difference (6 %/9	0 %)
Diameter of the light spot	
Angle of divergence	

Ambient light limit Functional safety related parameters MTTF_d Mission Time (T_M)

Diagnostic Coverage (DC) Indicators/operating means Operating display Function display Controls Controls **Electrical specifications** Operating voltage Ripple

No-load supply current Output Switching type Signal output

Switching current Switching frequency Response time

Ambient conditions Ambient temperature Storage temperature Mechanical specifications Protection degree Connection

Material Housing

ves

Optical face

Standard conformity

Product standard

Protection class

UL approval

CCC approval

Connector Mass

Switching voltage f

10 % I_0 ≤ 40 mA light/dark on switchable 1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected max. 30 V DC max. 100 mA 250 Hz 2 ms -40 ... 60 °C (-40 ... 140 °F) -40 ... 75 °C (-40 ... 167 °F) IP67

UB

M12 x 1 connector, 5-pin Plastic ABS plastic plastic 70 g Compliance with standards and directi-

EN 60947-5-2:2007 Approvals and certificates

II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 cULus Products with a maximum operating voltage of ${\leq}36$ V do not bear a CCC marking because they do not require approval.

Accessories **OMH-05** Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

OMH-07 Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

OMH-21 Mounting bracket

OMH-22 Mounting bracket

OMH-MLV11-K dove tail mounting clamp

OMH-RLK29 Mounting bracket

OMH-RLK29-HW Mounting bracket for rear wall mounting

OMH-RL28-C Weld slag cover model


Other suitable accessories can be found at www.pepperl-fuchs.com


2

Copyright Pepperl+Fuchs Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Curves/Diagrams

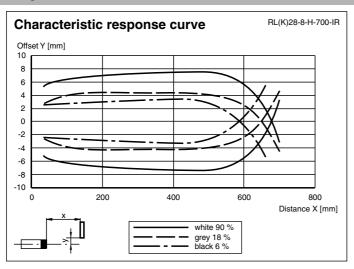

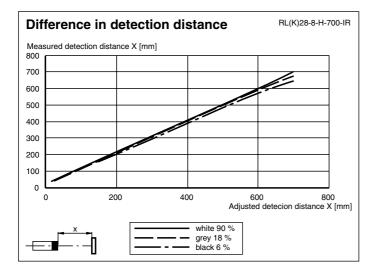

Additional information

Mounting instructions:

There are two bore holes for mounting the sensor with M5 bolts. The base surface must be flat to avoid distorting the housing during mounting. It is advisable to secure the bolts with spring washers so that the sensor does not become misaligned. Outdoor installation:

The sensor must be protected against rain and splash-water, possibly must a cover be installed.

Adjustment:

Adjust the sensor on the background. After the connecting to the power supply the green LED illuminates. In case the yellow LEDs illuminate too, the detection range needs to be reduced with the detection range adjuster, until the yellow LEDs is switched off. If the object is moved into the detection range the yellow LEDs illuminates.

Driving inductive loads:

If the sensor are used to drive inductive loads, the following safety procedures must be carried out: For operating voltage of 10 ... 30 V DC: fit a protection diode, max. 200 mA

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411 fa-info@pepperl-fuchs.com

